



New Product Release

Cheetah CUT-IN & Work Boxes 1 & 2 Gang High Strength Polycarbonate Non-Metallic Outlet Boxes



DESCRIPTION	CATALOG NUMBER	WHSL \$
1-Gang Shallow Cut-in Box * 14 cu inch	3000C	Wire Capacity: #14 - 6, #12 - 5, #10 - 4 Dimensions: 2.5" W x 4.2" H x 2.5" D

1 Gang Cut-in Box * 18 cu inches	3003C	Wire Capacity: #14 - 9, #12 - 8, #10 - 7 Dimensions: 2.5" W x 4.2" H x 3.35" D
-------------------------------------	-------	---




2 Gang Cut-in Box * 34 cu inches	3022C	Wire Capacity: #14 - 17, #12 - 15, #10 - 13 Dimensions: 4.25" W x 4.25" H x 3.30" D
-------------------------------------	-------	--



Low Voltage Cut-in Bracket Datacom Ring for Cheetah Devices	4007C	
--	-------	--

Cheetah Cut-in Boxes are 2-hour fire rated. Screws self-tighten pop-up flange to back of sheet rock.

Easy guides to mark exact Cut-in opening for box. No more guessing!

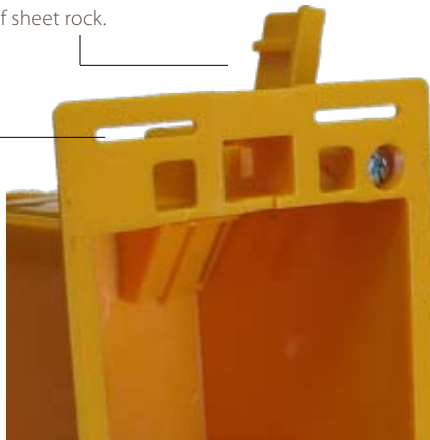

Low Voltage Cut-in Bracket is designed to "zip-tie" to sheet rock and then brake tabs off flush with wall.

Labor Savings

"A home that normally takes me 5-6 hours to trim out is now done in 1 hour. When I first heard of Cheetah-enabled devices I was skeptical. After I trimmed out my first house, I was sold. After my third house I was even faster. I love the product!"

3 Times Faster than Screws!
Cheetah Speed Device = 6-10 seconds
Old screw devices = 1-2 minutes